

DESCRIPTION

The Decorator Sonesse switch line is designed for use with SOMFY's Sonesse 30 dry-contact motors. This switch features a 4 wire terminal block which allows for an easy connection to the motor. Third party controllers may be easily connected to a secondary 4 wire terminal block located on the switch.




Part Number: 1800219 (White)
1800220 (Ivory)

MECHANICAL SPECIFICATIONS

Overall Dimensions: L: 4 1/2 in. W: 2 3/4 in. D: 1 1/2 in.

Installs in a standard single gang electrical box.

CONNECTION DIAGRAM

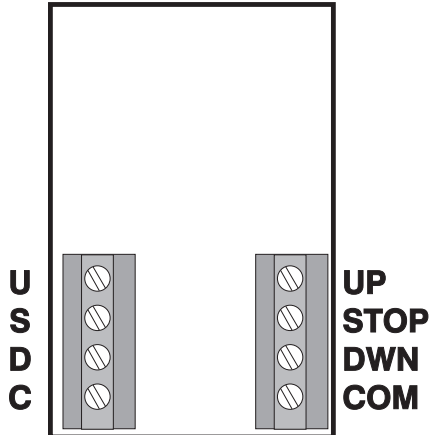

1. Connect the Sonesse30 motor to the low voltage terminal block as indicated.
2. Pressing the UP button should raise the window treatment, while pressing DOWN will lower it. To stop the window treatment at any time, simply press the STOP button.
3. If operation by a third party device is desired, the terminal blocks can be used as a connection point. A momentary contact between the UP and COM terminals will activate the Up command. Similarly, connecting the DWN and COM terminals will activate the Down command. To activate a Stop command, a momentary contact between STOP and COM is needed.
4. The Dry Contact Switch can be used to establish the following motor settings:
 - Upper and lower motor limits
 - Intermediate Stop (MY) position
 - Motor speed control
 - Rollup and Tilt Features

SOMFY CANADA
6315 Shawson Drive, Unit #1
Mississauga, Ontario L5T1J2

SOMFY SYSTEMS, INC.
47 Commerce Drive
Cranbury, NJ 08512